

INSTRUCTION MANUAL


Smart WiFi Valve Controller L3

nous

You will need Nous Smart Home App. Scan the QR code or download it from [direct link](#)



About controller

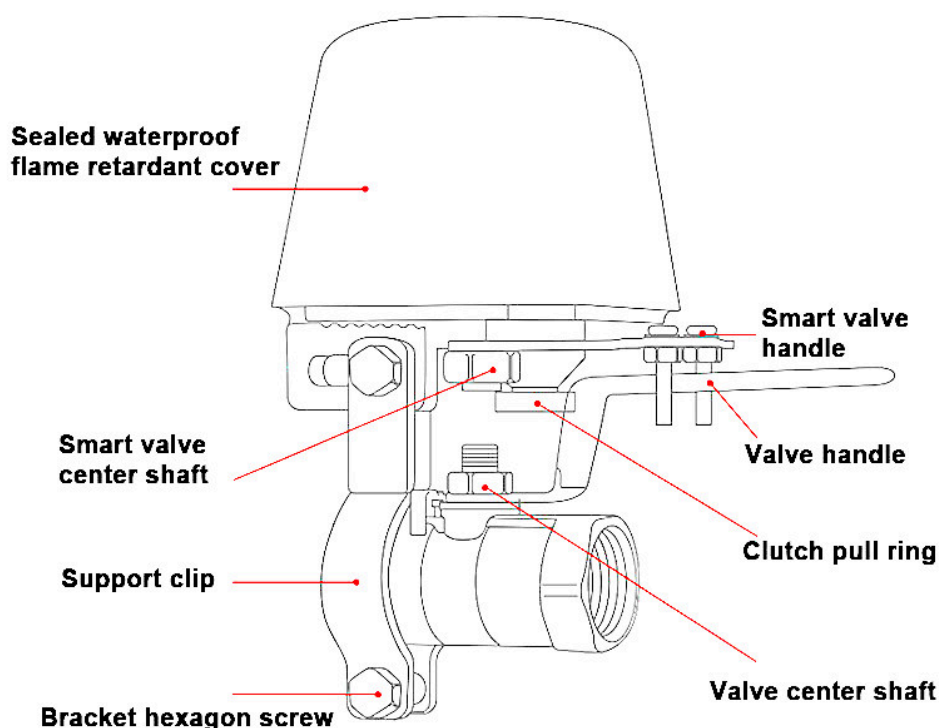

How to install

1. Install mounting bracket on the water or gas pipe/valve
2. Place the smart controller above valve and make sure that the controller shaft is directly inline with the axis of valve handle
3. Tighten the screws at the both ends of the mounting bracket (Make sure that center of the valve controller shaft is on the same axis as the valve center shaft, otherwise the valve cannot be completely closed and opened)
4. After that you can manually pull clutch ring down and check if the valve is opens and closes
5. Connect device to the power

How to connect and use

1. Make sure that the led indicator is flashing quickly. If not, hold the power button for 5 seconds untill the led starts blinking
2. open Nous Smart Home app
3. press + to add device
4. choose the valve controller from switches directory(or you can use autoscan as well)
5. confirm that the led is blinking
6. fill your WiFi data(2.4GHz only) and start connection
7. after pairing the smart valve is ready to be used.

Tips

- To reset device - press and hold power button for 5 seconds untill the led light is starts blinking(device ready to be paired again)
- If there is no WiFi - short press on power button will open and close the valve if needed.
- If there is no power - pull the clutch ring down and open or close the valve manually

- For preventing your valve to be stiffed with time, we would recommend you to schedule simple close-open sequence few time in a month.